


MODELS - SSL / SBS

SBS SHOWN

Models SSL and SBS blower coils have many standard and optional features which are unique to the industry

BUILT TOUGH. BUILT TO LAST™ | www.superiorrex.com

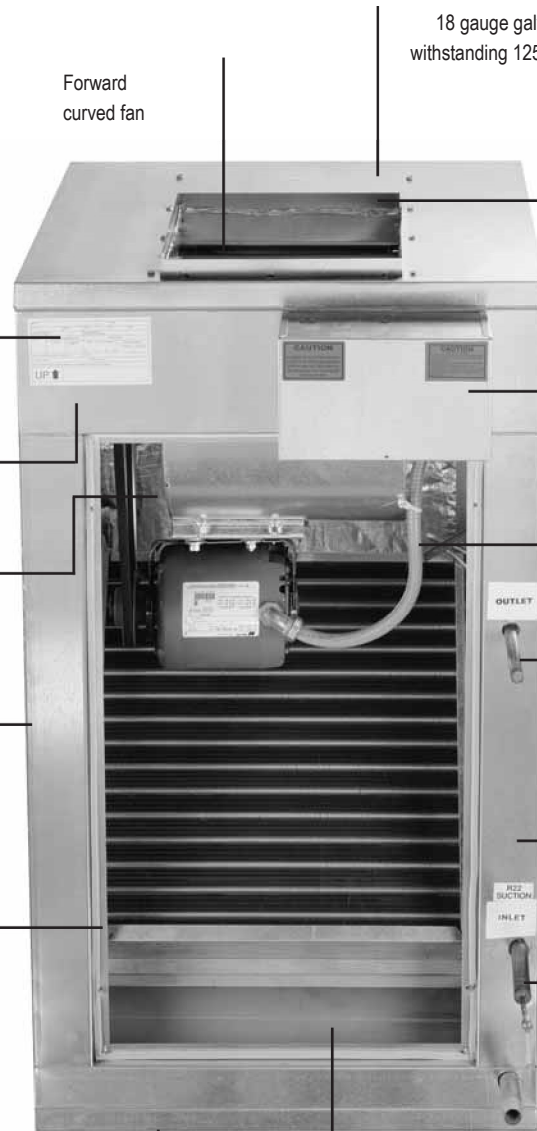

Forward curved fan

18 gauge galvanized steel casing withstanding 125 hour salt spray test per ASTM B-117

1" duct collar allows for quick field connection of duct work

Product label including tagging, airflow and electrical information

ETL label (not shown)

NEMA 1 control enclosure houses optional starter, disconnect, fusing, relays, and other electrical options

Scrim reinforced foil faced insulation, glued and pinned in place

Motor wiring in optional conduit

SBS filter access from top (not shown) reduces space required for installation

Coil stubouts extend through unit casing front, reducing space required for installation

Full size front access panel reduces space required for installation

Multi-bend construction for optimum strength and rigidity

SSL filter access from front (not shown) reduces space required for installation

Optional stainless steel drain pan

Heating and cooling coil stubouts on opposite sides